

FrameSaver 9000 Series Access Carrier Fan Tray Installation Instructions

Document Number 9000-A2-GN1E-00

Feature Number 9007-F1-899

December 1997

Overview

A replacement fan tray is available for the FrameSaver 9000 Series Access Carrier to cool the area occupied by the Network Access Modules (NAMs).

Fan Tray Installation


Use the following procedure to install the replacement fan tray into the FrameSaver 9000 Series Access Carrier.

► Procedure

1. Remove the old fan tray, if needed.
2. Place the replacement fan tray on the flanges at the bottom of the carrier with the power connector facing the mating power connector.

3. Slide the fan tray into the carrier until the power connectors engage firmly.
4. Tighten the captive screw.

Once the carrier is connected to ac power, the fans in the fan tray will begin blowing and the green LED will light. If not, check potential reasons in *Troubleshooting*.

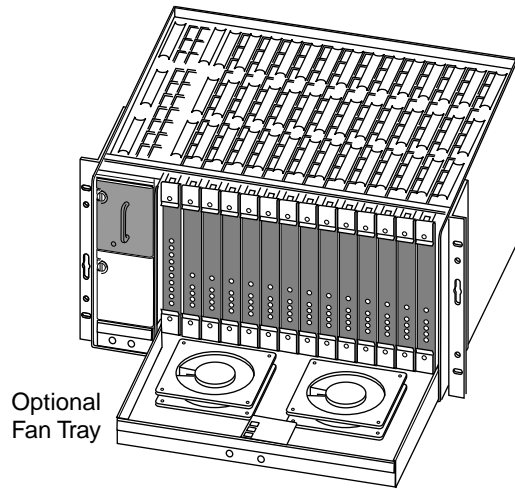

Front View

97-15753

Troubleshooting

Symptom	Possible Cause	Solutions
Yellow LED on the fan tray is lit	The fan tray is not operating at the proper speed.	Order a replacement fan tray.
Neither LED is lit	The access unit has no power.	Check the power. Check the circuit breaker.
	Power supply is not fully inserted into the housing.	Reinstall the power supply, making sure that you gently push it all the way into the housing.

If you are still having problems with the power supply or fan tray, contact your service representative.



9000-A2-GN1E-00